

# LT2611UXE --- Product Brief

## Quad-Port LVDS to HDMI2.0 Converter

### 1. Features

#### ● Quad-Port LVDS Receiver

- Compatible with VESA and JEIDA standard
- 1/2/4 configurable port
- 1 clock lane and 3/4/5 configurable data lanes per port
- Up to 1.5Gbps per data lane
- 6/8/10bit color depth
- Support DE and SYNC mode
- Support YCbCr4:2:2
- Internal term calibration with less than 5% error
- Support input De-SSC(30KHz $\pm$ 5%)
- 3D support: direct 3D input, 2-way 2D L/R input

#### ● HDMI2.0 Transmitter

- Data rate up to 6Gbps
- Support HDCP 1.4/2.3
- Support HDCP repeater
- Support HDR10 and Dolby Vision
- Support CEC
- Programmable transmitter swing and pre-emphasis

#### ● Digital Audio Input

- I2S interface supports up to 8-channel audio, with sample rates of 32~192 KHz and sample sizes of 16~24 bits
- SPDIF interface supports PCM, Dolby digital, DTS digital audio at up to 192KHz frame rate
- Compliant with IEC60958 or IEC61937

#### ● Miscellaneous

- CSC: RGB <-> YUV444 <-> YUV422
- Integrated 100/400KHz I2C slave
- External oscillator 24MHz, +/-50ppm

- Integrated microprocessor
- Embedded SPI flash for firmware and HDCP keys
- Firmware update through SPI or I2C interface
- Power supply: 3.3V and 1.2V

### 2. General Description

LT2611UXE is a high performance Quad-Port LVDS to HDMI2.0 converter.

For LVDS input, LT2611UXE can be configured as 4 Ports and 3/4/5 lanes per port. Up to 12dB equalization makes it suitable for long distance application and the maximum data rate is up to 1.5Gbps per lane.

The HDMI interface includes 4 TMDS clock/data pairs, DDC, and HPD signal. The HDMI transmitter is capable of supporting up to 6Gbps data rate. HDMI transmitter incorporates HDCP engines which support both HDCP1.4/2.3.

Two digital audio input interfaces are available, I2S or SPDIF. The I2S interface supports 8-ch LPCM and the SPDIF interface supports 2-ch LPCM or compressed audio, both at maximum 192 KHz sample rate.

The device is capable of automatic operation which is enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the configuration I2C slave interface.

### 3. Applications

- STB
- DVD/BD
- PTV Box

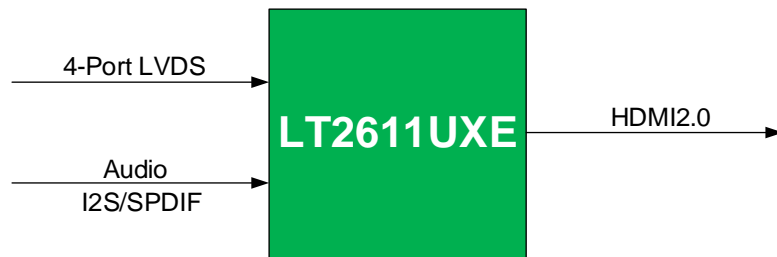


Figure 3.1 Application Diagram

## 4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT2611UXE	LT2611UXE_U2Q01CED	Preview	QFN100 (14*14)Saw	Cu	E	TBD	D	Tray	1190pcs

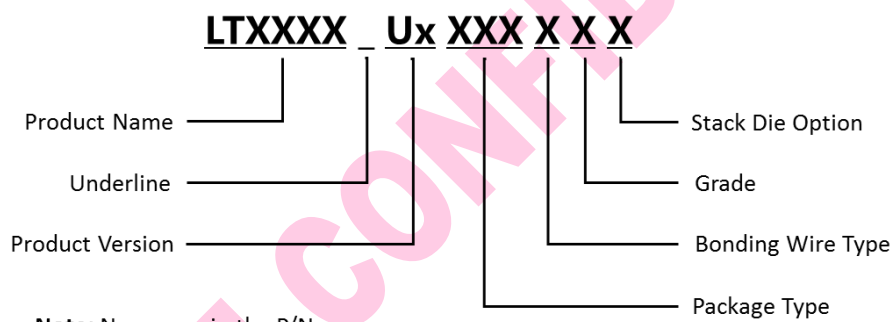


Figure 4.1 Part Number Naming Rules

**Copyright © 2024 Lontium Semiconductor Corporation, All rights reserved.**

### **Lontium Semiconductor Proprietary & Confidential**

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

### **Trademarks**

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

**Visit our corporate web page at: [www.lontiumsemi.com](http://www.lontiumsemi.com)**

**Technical support: [support@lontium.com](mailto:support@lontium.com)**

**Sales: [sales@lontium.com](mailto:sales@lontium.com)**